




Samsung Galaxy Tab S2 8.0 Screen Replacement

This guide will direct you through the steps of replacing your screen.

Written By: Jonathan Wood

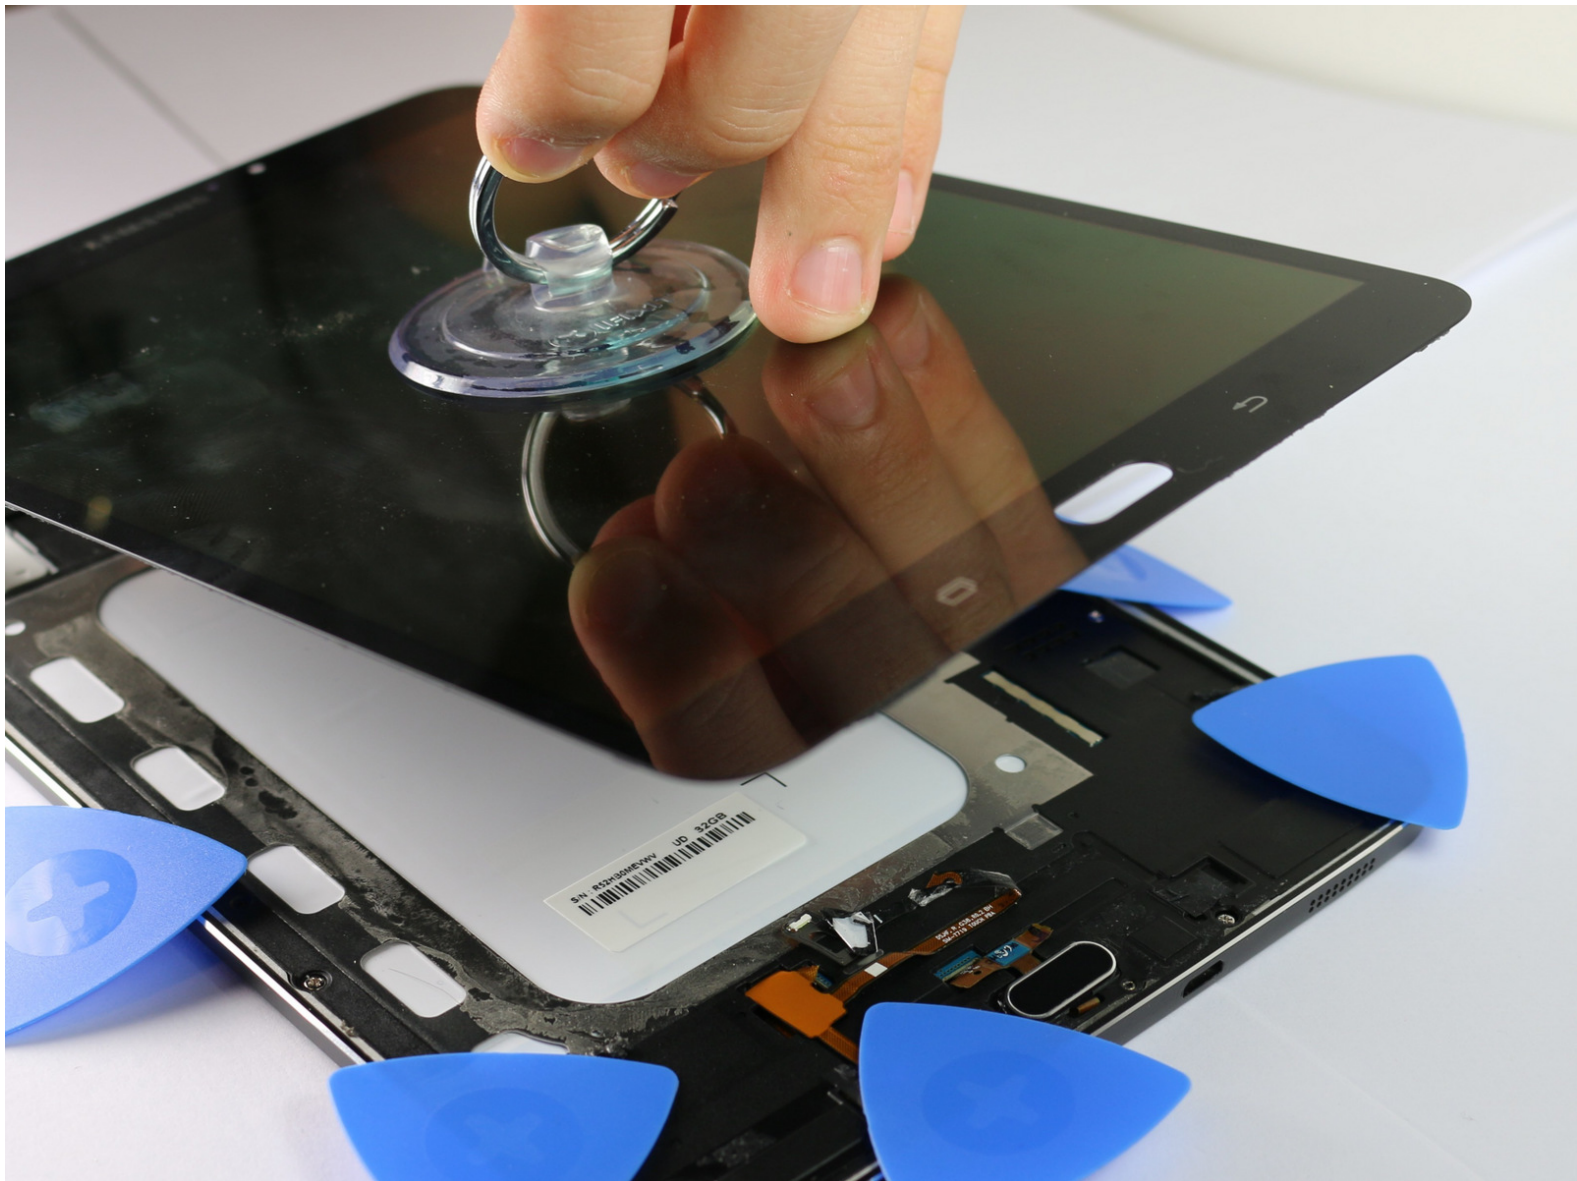

INTRODUCTION

If your screen is cracked or not displaying images as it should, replacing it will fix these problems.



TOOLS:

- [iFixit iOpener](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [iFixit Opening Tools](#) (1)
- [Suction Handle](#) (1)




PARTS:

- [Samsung Galaxy Tab S2 8.0 Screen](#) (1)

Step 1 — Screen



 Working on a device that is turned on may yield an electric shock. Make sure your device is turned off before working on it.

- Apply heat using an iFixit iOpener or another heating gun in order to weaken the adhesive around the edges of the screen.

Step 2




- Insert the plastic opening tool into the gap between the screen and tablet in the location where you want to start removing the screen.
- Put an opening pick in the gap created, in between the screen and the panel.
- Repeat all around device, putting 2 picks on top and bottom, and one on each side.


Step 3




- Carefully remove the small suction cup from the corner without moving the screen.
- Place the small suction cup in the center of the screen and lift to remove screen.

 The screen is still connected to the rest of the device by a cable, so don't pull the screen up too quickly.

Step 4

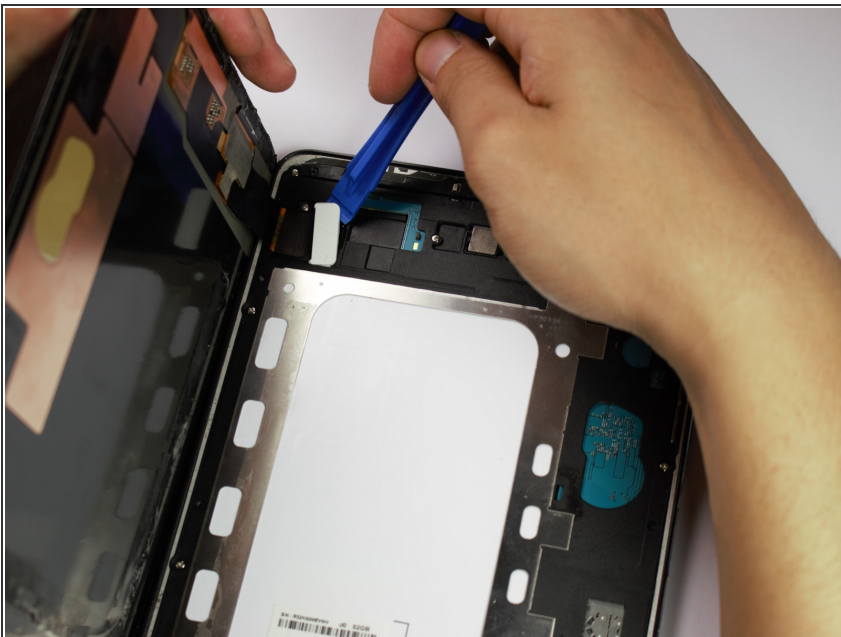

- Place the plastic opening tool underneath the ribbon cable connecting the screen to the tablet.
- Carefully lift the plastic opening tool to detach the ribbon from the tablet.

 Make sure to discharge any static electricity by touching a grounded metal object, like a quarter, before touching the inside of the device.

Step 5



- The screen is now detached from the rest of the tablet.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 02:15:34 PM.